






Leakmaster Hydrophilic Gun Grade Polyurethane Waterstop can be easily applied to rough or smooth concrete surfaces, and into difficult to get at places that are a challenge for regular waterstop products.

Furthermore, after hardening it has better physical properties than those of conventional putty type sealants. Because it is a moisture-cure, one component water-swelling sealant it can be easily applied with a standard caulking gun.

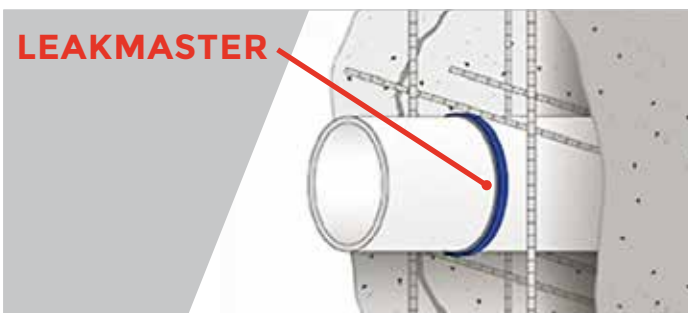

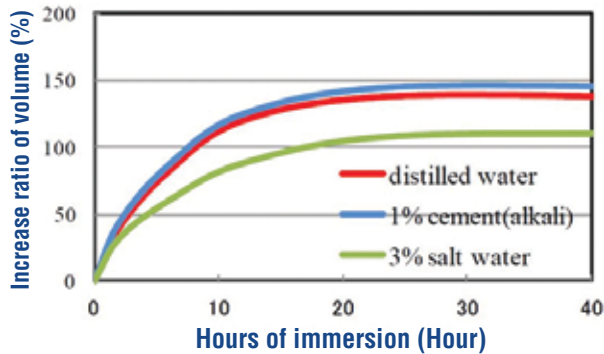

Swelling properties in various solutions of LEAKMASTER LV-Z

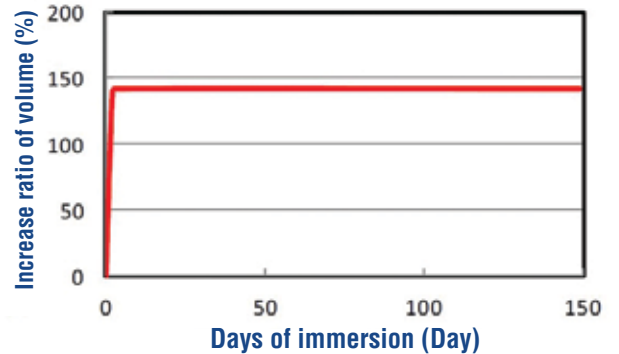

Long term swelling characteristics of LEAKMASTER LV-Z (distilled water)

LEAKMASTER PRODUCT SPECIFICATION:

ITEM	UNIT	SPECIFICATIONS	TEST METHOD
Extrudability	Second	Max. 20	In house Test
Slump	mm/1 hour	Max. 10	
Swelling Properties	%	85 - 200	In house Test After 2 days immersions

BENEFITS OF LEAKMASTER:

➤ **EASY APPLICATION:** As a moisture-cure one component type water-swelling sealant, general-use caulking guns can be used as with conventional sealants.

➤ **PHYSICAL PROPERTIES:** After hardening, it has better physical properties than those of conventional putty type sealants.

➤ **WATER SWELLING:** Swelling approx. 2 times in volume as a result of its distilled water absorption and swelling mechanisms, Leakmaster LV-Z provides excellent water sealing property without losing its rubber-like elasticity.